




TECHNICAL SPECIFICATION

PULL HANDLES

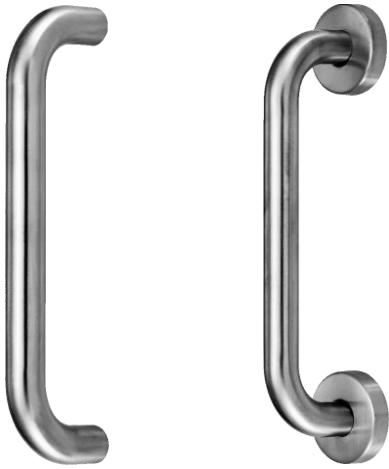

Pull Handles


D-Type pull handle with single side fixing

Product Code – How to order


LIPD	300A	(300 CTC, 19mm dia)
BS	225A	(225 CTC, 19mm dia)
CS	300B	(300 CTC, 22mm dia)
RS	300E	(300 CTC, 25mm dia)
	450C	(450 CTC, 32mm dia)
	600C	(600 CTC, 32mm dia)
	800C	(800 CTC, 32mm dia)

Example: **LIPDBS300E** for 300mm CTC, 25mm Dia bolt thru fixing pull handle


CS Fixing

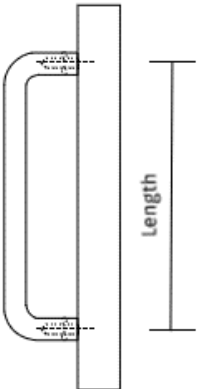

RS Fixing

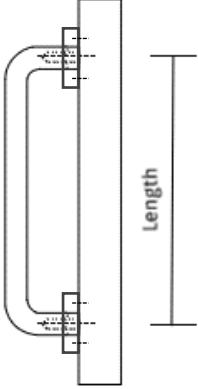

BS Fixing

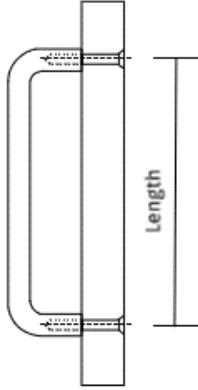

Fixings Available

- BS: Bolt-thru fixing (for upto 65mm thick doors)
- CS: Concealed fixing
- RS: Rose fixing

Specification

D-type pull handle with single side fixing
 Heavy duty inserts for long lasting durability
 Manufactured from Stainless steel SS304 grade
 Suitable for wood, metal and aluminium door applications
 Supplied with suitable screws and fixings

Finishes

- SSS - Satin stainless steel
- PSS - Polished stainless steel

*Special finish available upon request subject to minimum order quantity

*SS316 available upon request subject to minimum order quantity

*Kindly contact the technical team for doors more than 65mm thickness